


NOTES:

- 1. INDICATOR IS FLUSH WITH SURFACE [A] BEFORE FUSE OPENS
INDICATOR EXTENDS .44 IN. [11.2mm] AFTER FUSE OPENS AND EXERTS
AN 1 LBF AT THE END OF TRAVEL

REV.	DATE	ECO	DESCRIPTION	BY	CK	APP
C	1/20/20	N/A	REDRAWN	GDR	N/A	N/A
D	1/4/2024	18032	UPDATED TITLE BLOCK, ADDED NOTES, 1LBS FORCE WAS 2LBS FORCE	YF	N/A	SEE ECO

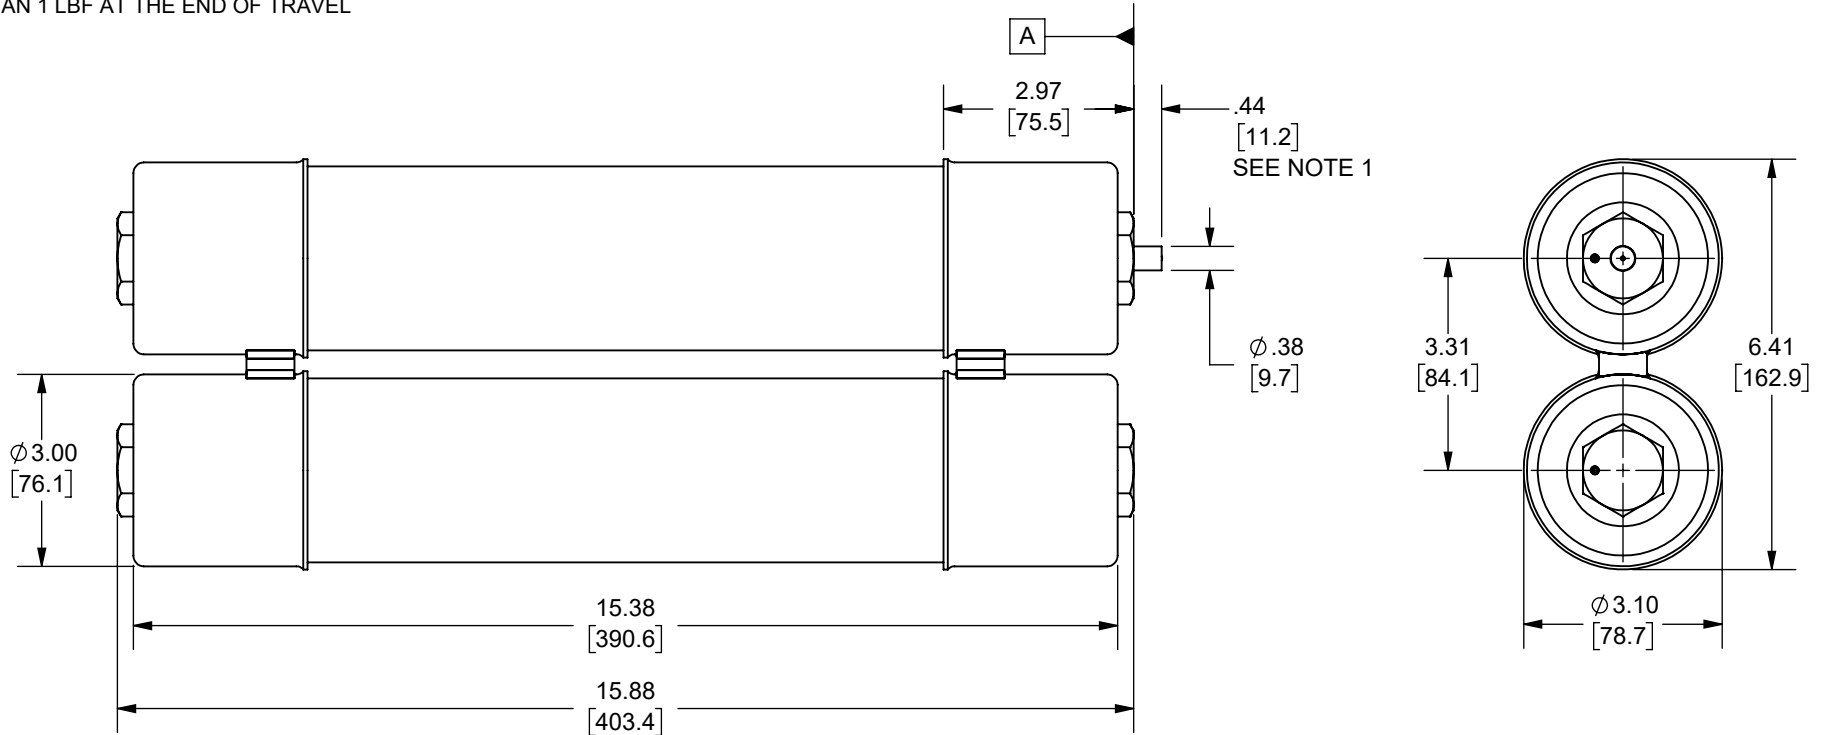

OUTLINE DIMENSIONS
NOT TO BE USED FOR PRODUCTION
DIMENSIONS IN [] ARE MILLIMETERS

Approval stage / Etat d'approbation: APPROUVÉ POUR FABRICATION / APPROVED FOR MANUFACTURING		Product Class:/ Product Type: MEDIUM VOLTAGE R-RATED		
Initial ECO / ECO intiale: ECO-18032-000		Product amp rating:/ Voltage rating: 18-24R 5.08kV		
Draw by / Dessiné par: Yadyra Fang	Date : 6/14/2024	Title / Titre: OUTLINE A480R(18, 24)R-1 25-131-891-(507, 508)		
Checked by / Vérifié par: Luis ARMENTA	Date : 6/14/2024			
Electrical Power 374 MERRIMAC STREET NEWBURYPORT, MA 01950		Éch / Scale : 1:3 Format / Size : A	Part / Article: SEE TABLE	Page : 1/1

Weight :
Masse :

Rev : **D**
Rév :

25-131-891-508
25-131-891-507
A480R24R-1
A480R18R-1
CATALOG NUMBER



Ce plan strictement confidentiel est la propriété exclusive de la société MERSEN sans l'autorisation écrite de laquelle il ne peut être ni reproduit, ni copié, ni communiqué à des tiers.
This drawing and specifications there on is property of MERSEN and shall not be reproduced or copied or used in whole or in part as the base for manufacture or sale of item without written permission.