


## DC Square-body Fuses Sizes 600 - 602 - 2x602 SR Bracket size 602 - 4200 V DC

SRF-SRH from 200 to 375 A

### Dimensions

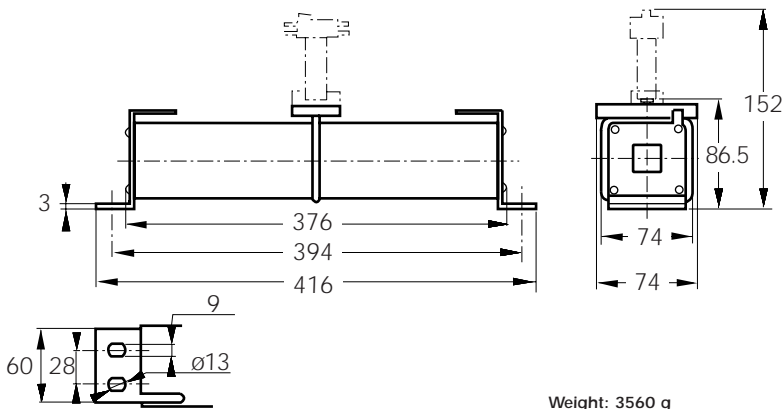

### Main Characteristics

Size	Current rating $I_N$ (A)	Breaking capacity	Watts loss		Max. $I^2t$ @ 3500 V		Designation	Ref. Number	Catalog Number
			$0.8 I_N$ (W)	$I_N$ (W)	L/R = 15 ms (A <sup>2</sup> S)	L/R = 45 ms (A <sup>2</sup> S)			
602	200	@ 4200 V DC	119	228	45000	80000	CC 42 SRF 602 QF 0200	J079496	D602SF42C200QF
	250	60 kA	122	232	100000	180000	CC 42 SRF 602 QF 0250	K079497	D602SF42C250QF
	315	L/R = 15 ms	128	245	220000	375000	CC 42 SRF 602 QF 0315	L079498	D602SF42C315QF
	375		147	280	195000	325000	CC 42 SRH 602 QF 0375	H076643	D602SH42C375QF

Pack: 1 piece

Microswitch MC 2R 3E 1-5NBS Ref. Number: J310025

FERRAZ SHAWMUT  
IS NOW

**MERSEN**




## DC Square-body Fuses Sizes 600 - 602 - 2x602 SR Bracket size 602 - 4200 V DC

SRF-SRH from 200 to 375 A

### Electrical characteristics


#### DC applications data

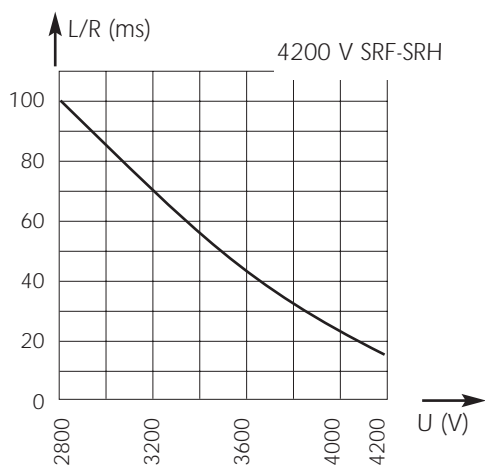

Above: Curve indicates maximum permissible value of time constant L/R as a function of DC working voltage


**Max. AC voltage (50/60 Hz):**  
 3,800 V with breaking capacity of 50 kA

#### Time vs. current characteristics

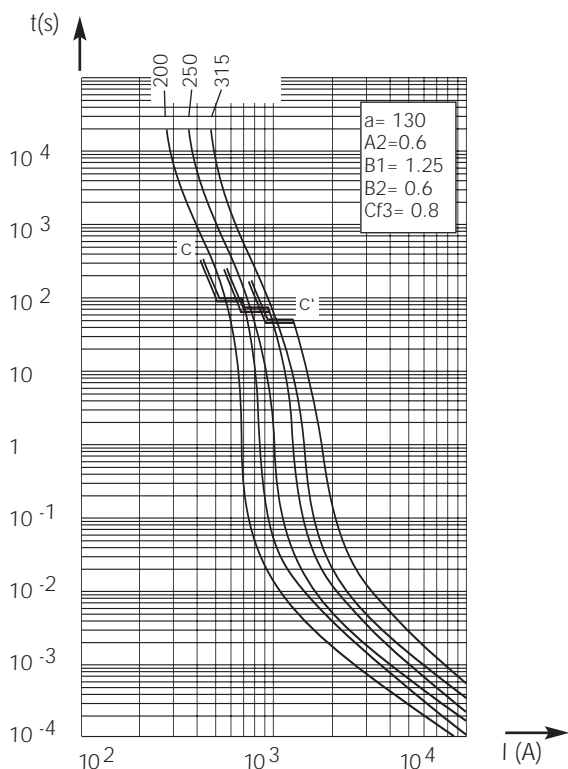

Above: Curves indicate, for each rated current, pre-arcing time vs. R.M.S. pre-arcing current

#### Peak arc voltage vs. working voltage

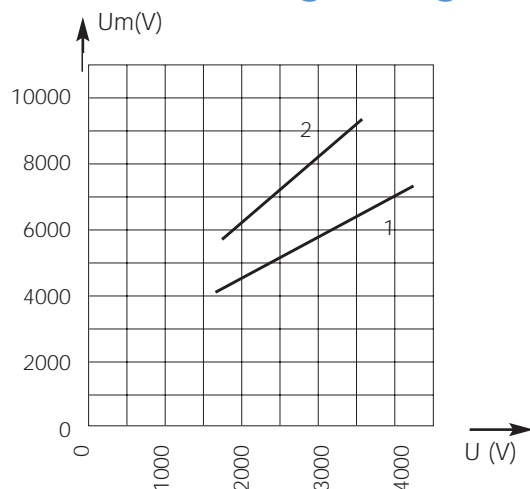

1 : L/R = 15 ms 4200 V SRF-SRH  
 2 : L/R = 45 ms 4200 V SRF-SRH

Above: Curves indicate for various time constants L/R the peak arc voltage which may appear across fuse terminals, vs. DC working voltage