


| REV | DATE | ECO | DESCRIPTION | BY | CK | APP |
|-----|---------|-----|-----------------|-----|-----|-----|
| - | 4/22/02 | N/A | INITIAL RELEASE | LAS | N/A | N/A |

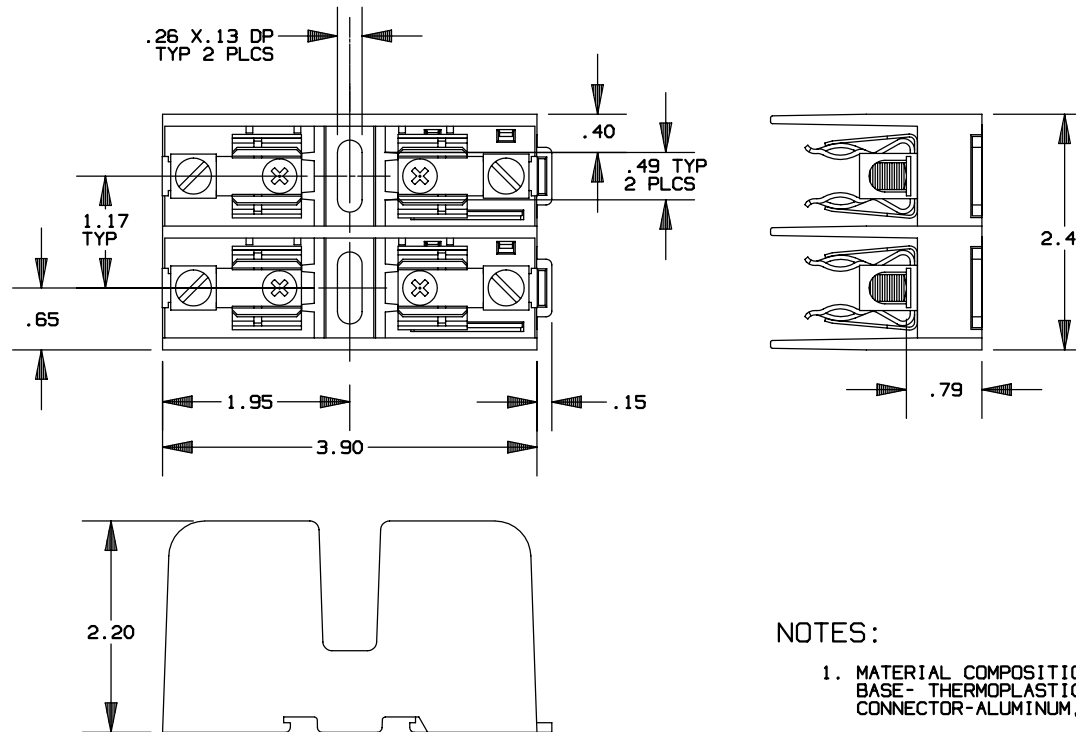

NOTES:

1. MATERIAL COMPOSITION AND RATING:
BASE- THERMOPLASTIC 125°C RTI
CONNECTOR-ALUMINUM, TIN PLATED.
2. ALL TOLERANCES ±.010 UNLESS OTHERWISE SPECIFIED.

| P/N | FUSE CLASS | RMS SYM RATING | TORQUE (IN-LBS) | WIRE | | UL | |
|--------|------------|----------------|-----------------|-------|-------|----------|-----------|
| | | | | °C | TYPE | FILE NO. | GUIDE NO. |
| U71007 | 22x58mm | 200K | 35 | 60/75 | CU-AL | E52283 | IZLT2 |

| | | |
|-----------------------------------|-----------------------------------|---|
| | | FERRAZ SHAWMUT INC. 374 MERRIMAC STREET NEWBURYPORT, MA 01950 |
| PRODUCT MANAGER SIGN: DATE: | DESIGN ENGINEER SIGN: DATE: | |

FUSE BLOCK, 750V-100A, 2 POLE
22x58mm FUSES

OUTLINE DIMENSIONS
NOT TO BE USED FOR PRODUCTION

700814